

LIUGONG

S2632E

AWP

**WORKING HEIGHT
MAX.**
10 / 8 M (32'9" / 26'3")

**OVERALL LIFT
CAPACITY MAX.**
230 KG (507 LB)




OVERALL WIDTH
0.844 M (2'9")

OVERALL LENGTH
2.49 M (8'2")

OVERALL WEIGHT
2,200 KG (4,850 LB)



S2632E SPECIFICATIONS >>>

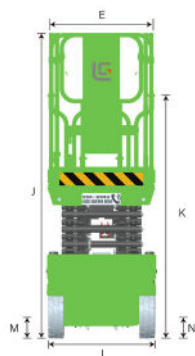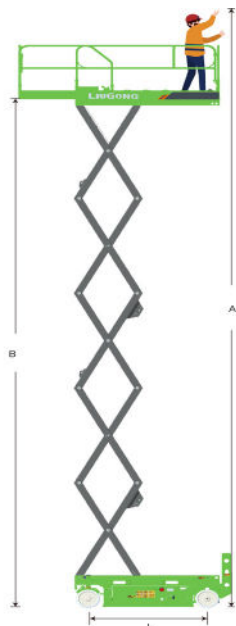

DIMENSIONS

A. Working Height Max.	10 / 8 m (32'9" / 26'3")
B. Platform Height Max.	8 / 6 m (26'3" / 19'8")
C. Platform Height (Stowed)	1.22 m (4')
D. Platform Length	2.28 m (7'6")
E. Platform Width	0.81 m (2'8")
F. Extension Deck (Roll Out)	0.9 m (2'11")
G. Overall Length	2.49 m (8'2")
H. Overall Length (Without Ladder)	2.29 m (7'6")
I. Overall Width	0.844 m (2'9")
J. Stowed Height (Rails Up)	2.36 m (7'9")
K. Stowed Height (Rails Down)	1.8 m (5'10")
L. Wheelbase	1.88 m (6'2")
M. Ground Clearance (Pothole Raised)	0.1 m (4")
N. Ground Clearance (Pothole Deployed)	0.02 m (0.8")

PRODUCTIVITY

Overall Lift Capacity Max.	230 kg (507 lb)
Extension Deck Capacity	100 kg (220 lb)
Platform Occupancy Max. (Indoor/Outdoor)	2 / 1
Drive Speed (Stowed)	2.5 km/h (1.55 mph)
Drive Speed (Raised)	0.4 km/h (0.25 mph)
Turning Radius (Inside/Outside)	0.24 / 2.2 m (9" / 7'3")
Lift/Lower Time	38 / 34 s
Gradeability	25 %
Tilt Sensor Activation	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	381 × 127 mm (1'3" x 5")

POWER

Battery	24 V / 225 Ah (5.4 kWh)
Charger	24 V / 30 A
Lift Motor	24 V / 3.3 kW
Drive Motor	24 V / 0.7 kW

WEIGHT

Overall Weight	2,200 kg (4,850 lb)
----------------	---------------------