

LIUGONG

S4655E

AWP




WORKING HEIGHT MAX.	OVERALL LIFT CAPACITY MAX.	OVERALL WIDTH	OVERALL LENGTH	OVERALL WEIGHT
16 / 8 M (52'6" / 26'3")	350 KG (771 LB)	1.38 M (4'6")	3.1 M (10'2")	3,720 KG (8,201 LB)



South Entrance 5



S4655E SPECIFICATIONS >>>

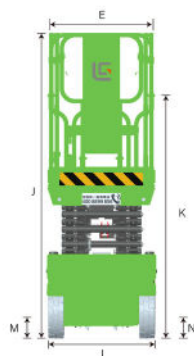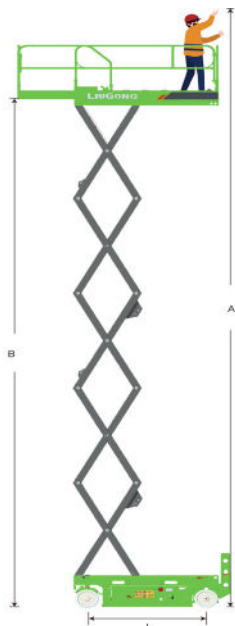

DIMENSIONS

A. Working Height Max.	16 / 8 m (52'6" / 26'3")
B. Platform Height Max.	14 / 6 m (45'11" / 19'8")
C. Platform Height (Stowed)	1.66 m (5'5")
D. Platform Length	2.88 m (9'5")
E. Platform Width	1.35 m (4'5")
F. Extension Deck (Roll Out)	1.22 m (4')
G. Overall Length	3.1 m (10'2")
H. Overall Length (Without Ladder)	2.9 m (9'6")
I. Overall Width	1.38 m (4'6")
J. Stowed Height (Rails Up)	2.74 m (8'11")
K. Stowed Height (Rails Down)	1.97 m (6'6")
L. Wheelbase	2.5 m (8'2")
M. Ground Clearance (Pothole Raised)	0.15 m (6")
N. Ground Clearance (Pothole Deployed)	0.02 m (0.8")

PRODUCTIVITY

Overall Lift Capacity Max.	350 kg (771 lb)
Extension Deck Capacity	136 kg (299 lb)
Platform Occupancy Max. (Indoor/Outdoor)	3 / 2
Drive Speed (Stowed)	2.5 km/h (1.55 mph)
Drive Speed (Raised)	0.4 km/h (0.25 mph)
Turning Radius (Inside/Outside)	0.3 / 3.12 m (11" / 10'3")
Lift/Lower Time	90 / 60 s
Gradeability	25 %
Tilt Sensor Activationx	X 1.5° / Y 3°
Tire Size (Solid Non-marking)	381 × 127 mm (1'3" x 5")

POWER

Battery	24 V / 270 Ah (6.48 kWh)
Charger	24 V / 30 A
Lift Motor	24 V / 3.3 kW
Drive Motor	24 V / 0.7 kW

WEIGHT

Overall Weight	3,720 kg (8,201 lb)
----------------	---------------------